



Before

Eibach PRO-SPACERS are a simple, strong, cost-effective way to eliminate the lateral gap between your wheels and the outer fender edge, allowing you to fine-tune the look and handling performance of your wheels, either stock or custom.




After

With the right Eibach PRO-SPACERS installed, your car takes on a wider, more aggressive stance, with the wheels and tires filling the wheel arches just the way they should. And PRO-SPACERS can help improve your handling just as they improve your look.


Bolt Style Wheel Attachment

System 1*

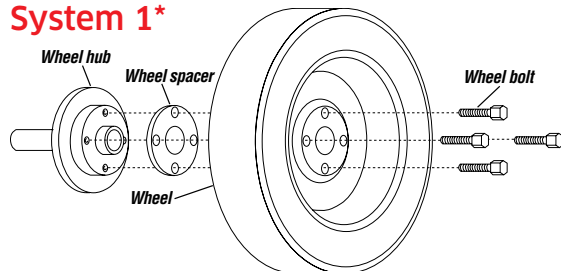


- Spacer disc (5 mm - 8 mm) with bolt through-system
- Hub-Centric through center bore
- Fastening by using longer wheel bolts (included)

System 2*

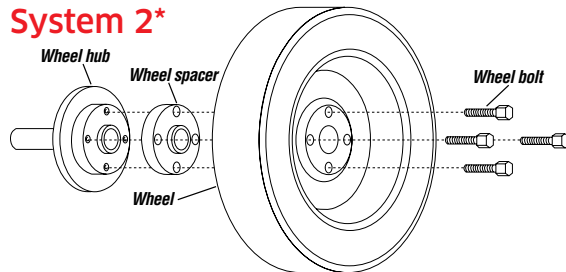

- Spacer disc (10 mm - 20 mm) with bolt through-system
- Hub-Centric with centering hub
- Fastening by using longer wheel bolts (included)


System 3/7

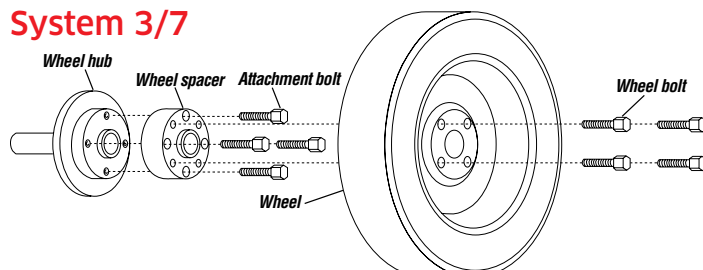

- Spacer disc (20 mm - 30 mm) with bolt on-system
- Hub-Centric with centering hub
- Fastening by using spacer bolts (included) and original wheel bolts (not included)


Stud/Nut Style Wheel Attachment

System 4/8

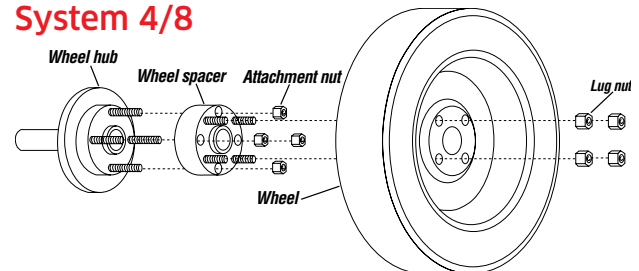


- Spacer disc (20 mm - 30 mm) with bolt on-system
- Hub-Centric with centering hub
- Fastening by using spacer nuts (included) and your original wheel lug nuts (not included)

System 5

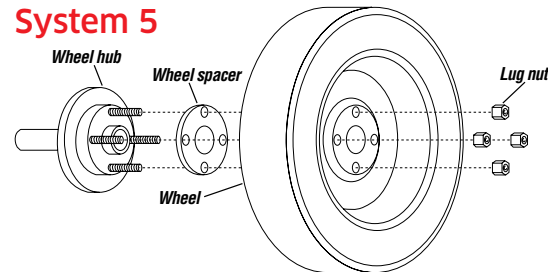

- Spacer disc (5 mm - 8 mm) with bolt through-system
- Hub-Centric through center bore
- Fastening by using longer studs (included) and your original wheel lug nuts (not included)

System 6

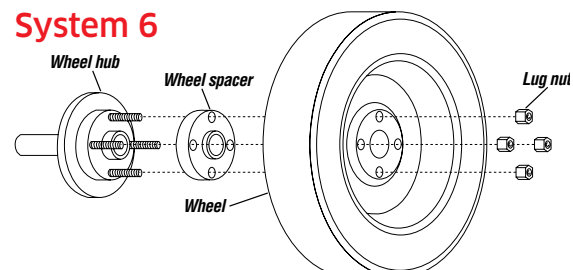

- Spacer disc (10 mm - 20 mm) with bolt through-system
- Hub-Centric with centering hub
- Fastening by using longer studs (included) and your original wheel lug nuts (not included)

* Please note: All System 1 and 2 PRO-SPACER kits include longer wheel bolts for stock/OEM wheels. Aftermarket wheels may require a different seat style (ball vs. tapered, etc.), these bolts can be ordered separately as well as the PRO-SPACER kits (System 1 and 2) are available without bolts. Please call for more information-1-800-222-8811

Manufacture / Model	YEAR	P.C.D Bolt Pattern	Center Bore/ Hub Diameter	Bolt/ Stud	Thread Type	Spacer Width (Each)	Notes	PRO-SPACER with Bolts/Studs (Pair)	System Type
ACURA									
CL 2.2, 2.3, 3.0	97-99	4x114.3	64 mm	Stud	12x1.5	5mm	S33	90.5.05.018.1	5
						15mm	S33	90.6.15.021.1	6
Integra (Exc. Type-R) (DA, DC2/4)	90-01	4x100	56.1 mm	Stud	12x1.5	5mm	S33	90.5.05.005.1	5
TL 2.5	95-98	4x114.3	64 mm	Stud	12x1.5	5mm	S33	90.5.05.018.1	5
						15mm	S33	90.6.15.021.1	6
AUDI									
A4, Sedan, 4 Cyl., 6 Cyl., 2WD, Quattro (B5)	96-01	5x112	57.1 mm	Bolt	14x1.5	5mm	S11	90.1.05.006.2	1
						8mm	S11	90.1.08.001.2	1
						15mm	S13	90.2.15.005.2	2
						20mm	S13	90.2.20.004.2	2
						25mm	S13	90.7.25.005.2	7
A4, Sedan, Avant (Wagon) 2WD, Quattro, S4 (B6/B7)	02-08	5x112	57.1 mm	Bolt	14x1.5	5mm	S8,S11	90.1.05.016.2	1
						8mm	S8,S11	90.1.08.001.2	1
						15mm		90.2.15.005.2	2
						20mm		90.2.20.004.2	2
						25mm		90.7.25.005.2	7
A4, Sedan, Avant (Wagon), 2WD, Quattro (B8)	09-12	5x112	66.5 mm	Bolt	14x1.5	12mm	S3	90.2.12.018.2	2
						15mm		90.2.15.052.2	2
						20mm		90.2.20.034.2	2
						25mm		90.7.25.016.2	7
						30mm		90.7.30.007.2	7
A4, Cabriolet, 2WD, 4 Cyl (8H/B6/B7)	03-08	5x112	57.1 mm	Bolt	14x1.5	5mm	S11	90.1.05.016.2	1
						8mm	S11	90.1.08.002.2	1
						15mm		90.2.15.013.2	2
						20mm		90.2.20.003.2	2
						25mm		90.7.25.005.2	7
S4, Sedan, Quattro, 2.7 T (B5S)	00-02	5x112	57.1 mm	Bolt	14x1.5	5mm	S11	90.1.05.006.2	1
						8mm	S11	90.1.08.001.2	1
						15mm		90.2.15.005.2	2
						20mm		90.2.20.004.2	2
						25mm		90.7.25.005.2	7
A5, S5, 2WD, Quattro (B8)	08-12	5x112	66.5 mm	Bolt	14x1.5	12mm		90.2.12.018.2	2
						15mm		90.2.15.052.2	2
						20mm		90.2.20.034.2	2
						25mm		90.7.25.016.2	7
						30mm		90.7.30.007.2	7
A6, Sedan, Avant (Wagon) Quattro, 6 Cyl., V8 (C4)	07/94-12/97	5x112	57.1 mm	Bolt	14x1.5	5mm	S11	90.1.05.006.2	1
						8mm	S11	90.1.08.001.2	1
						15mm		90.2.15.005.2	2
						20mm		90.2.20.004.2	2
						25mm		90.7.25.005.2	7
A6, Sedan, Avant (Wagon) Quattro, 6 Cyl., V8, S6 (C5)	01/97-01/05	5x112	57.1 mm	Bolt	14x1.5	5mm	S11	90.1.05.016.2	1
						8mm	S11	90.1.08.002.2	1
						15mm		90.2.15.013.2	2
						20mm		90.2.20.003.2	2
						25mm		90.7.25.005.2	7
A6, Sedan, Avant (Wagon), 2WD, Quattro, (C6)	05-11	5x112	57.1 mm	Bolt	14x1.5	12mm		90.2.12.003.2	2
						15mm		90.2.15.013.2	2
						20mm		90.2.20.003.2	2
						25mm		90.7.25.005.2	7
A8, S8, Sedan, Quattro V8 (D2, D3)	95-09	5x112	57.1 mm	Bolt	14x1.5	5mm	S11	90.1.05.016.2	1
						8mm	S11	90.1.08.002.2	1
						15mm		90.2.15.013.2	2
						20mm		90.2.20.003.2	2
						25mm		90.7.25.005.2	7

(S3) Only for use on the front axle!

(S6) Rear axle only.

(S8) Caution, for some S4 models only for use on the rear axle!

(S9) Spacers can only be used with wheels that have cut-outs (facing the hub) to clear the stock studs. Please check as follows: Original stud length (i.e. 35mm) minus spacer-thickness (i.e. 25mm) = 10mm excess stud length. The cut-out should have a depth of 11mm.

WHEEL SPACERS | Car, Truck & SUV's

Manufacture / Model	YEAR	P.C.D Bolt Pattern	Center Bore/ Hub Diameter	Bolt/ Stud	Thread Type	Spacer Width (Each)	Notes	PRO-SPACER with Bolts/Studs (Pair)	System Type
AUDI									
Q5, Quattro (8R)	09-11	5x112	66.5 mm	Bolt	14x1.5	12mm		90.2.12.018.2	2
						15mm		90.2.15.052.2	2
						20mm		90.2.20.034.2	2
						25mm		90.7.25.016.2	7
						30mm		90.7.30.007.2	7
TT Coupe / Roadster/ Convertible, 2WD, 4 Cyl. (TTR)	99-06	5x100	57.1 mm	Bolt	14x1.5	5mm	S11 S11	90.1.05.006.2	1
						8mm		90.1.08.001.2	1
						15mm		90.2.15.005.2	2
						20mm		90.2.20.004.2	2
						25mm		90.7.25.003.2	7
TT, Quattro, 3.2L (TTR)	04-06	5x100	57.1 mm	Bolt	14x1.5	5mm	S11 S11	90.1.05.006.2	1
						8mm		90.1.08.001.2	1
						15mm		90.2.15.005.2	2
						20mm		90.2.20.004.2	2
						25mm		90.7.25.003.2	7
BMW									
128i, 135i, Incl. Convertible (E82, E87)	08-11	5x120	72.5 mm	Bolt	12x1.5	5mm	S11	90.1.05.017.1	1
						12mm		90.2.12.002.1	2
						15mm		90.2.15.001.1	2
						20mm		90.2.20.020.1	2
						25mm		90.7.25.011.1	7
30mm	90.7.30.002.1	7							
318i, 325e, 325i, 325is, 2 & 4-door, Convertible (E30)	11/82-05/93	4x100	57.1 mm	Bolt	12x1.5	5mm	S11 S11 S13	90.1.05.010.1	1
						8mm		90.1.08.003.1	1
						15mm		90.2.15.004.1	2
						20mm		90.2.20.011.1	2
						25mm		90.7.25.001.1	7
318i, 318is, 325i, 328i, M3, 2 & 4 door, Convertible (E36)	12/90-04/99	5x120	72.5 mm	Bolt	12x1.5	5mm	S11	90.1.05.017.1	1
						15mm		90.2.15.001.1	2
						20mm		90.7.20.010.1	7
						25mm		90.7.25.011.1	7
						30mm		90.7.30.002.1	7
323i, 325i, 328i, 330i, 2 & 4 door, Sport Wagon, M3, Convertible (E46)	04/98-06	5x120	72.5 mm	Bolt	12x1.5	5mm	S11	90.1.05.017.1	1
						12mm		90.2.12.002.1	2
						15mm		90.2.15.001.1	2
						20mm		90.2.20.020.1	2
						25mm		90.7.25.011.1	7
30mm	90.7.30.002.1	7							
325i, 328i, 330i, 335i, Coupe, Sedan, Convertible, Wagon (E90, E91, E92, E93)	06-11	5x120	72.5 mm	Bolt	12x1.5	5mm	S11	90.1.05.017.1	1
						12mm		90.2.12.002.1	2
						15mm		90.2.15.001.1	2
						20mm		90.2.20.020.1	2
						25mm		90.7.25.011.1	7
30mm	90.7.30.002.1	7							
528e, 525i, 530i, 533i, 535i, 540i, M5 (E28, E34)	82-03/97	5x120	72.5 mm	Bolt	12x1.5	5mm	S11	90.1.05.017.1	1
						15mm		90.2.15.001.1	2
						20mm		90.7.20.010.1	7
						25mm		90.7.25.011.1	7
						30mm		90.7.30.002.1	7
525i, 528i, 530i, 540i, Wagon, Touring (E39)	97-03	5x120	74 mm	Bolt	12x1.5	5mm		90.1.05.007.1	1
						15mm		90.2.15.002.1	2
						20mm		90.7.20.002.1	7
						25mm		90.7.25.010.1	7

(S10) For vehicles with a center hub height up to 11mm.

(S11) The centering of the wheel is only possible with the wheel bolts! Therefore, it may be necessary to do wheel balancing on the car - to avoid possible vibration.

Manufacture / Model	YEAR	P.C.D Bolt Pattern	Center Bore/ Hub Diameter	Bolt/ Stud	Thread Type	Spacer Width (Each)	Notes	PRO-SPACER with Bolts/Studs (Pair)	System Type
525i, 528i, 530i, 545i, 550i, Wagon, Touring (E60, E61)	04-08	5x120	72.5 mm	Bolt	12x1.5	5mm	S11	90.1.05.017.1	1
						12mm		90.2.12.002.1	2
						15mm		90.2.15.001.1	2
						20mm	S67	90.7.20.010.1	7
						25mm		90.7.25.011.1	7
						30mm		90.7.30.002.1	7
528i/ 535i/ 550i, Sedan, Gran Turismo, (Incl. xDrive)(F07, F10)	10-12	5x120	72.5 mm	Bolt	14x1.25	12mm		90.2.12.002.7	2
						15mm		90.2.15.001.7	2
						20mm		90.2.20.020.7	2
						25mm		90.7.25.038.7	7
						30mm		90.7.30.032.7	7
633csi, 635csi, M6, (E24)	82-90	5x120	72.5 mm	Bolt	12x1.5	5mm	S11	90.1.05.017.1	1
						15mm		90.2.15.001.1	2
						20mm		90.7.20.010.1	7
						25mm		90.7.25.011.1	7
						30mm		90.7.30.002.1	7
645ci, 650i, Cabrio (E63, E64)	04-10	5x120	72.5 mm	Bolt	12x1.5	5mm	S11	90.1.05.017.1	1
						12mm		90.2.12.002.1	2
						15mm		90.2.15.001.1	2
						20mm	S67	90.7.20.010.1	7
						25mm		90.7.25.011.1	7
						30mm		90.7.30.002.1	7
650i Coupe, Convertible (F12)	2012	5x120	72.5 mm	Bolt	14x1.25	12mm		90.2.12.002.7	2
						15mm		90.2.15.001.7	2
						20mm		90.2.20.020.7	2
						20mm	S46	90.7.20.036.7	7
						25mm		90.7.25.038.7	7
						30mm		90.7.30.032.7	7
735i, 740i, 740iL, (E32)	88-94	5x120	72.5 mm	Bolt	12x1.5	5mm	S11	90.1.05.017.1	1
						15mm		90.2.15.001.1	2
						25mm		90.7.25.011.1	7
						30mm		90.7.30.002.1	7
740i, 750iL, (E38)	94-01	5x120	72.5 mm	Bolt	12x1.5	5mm	S11	90.1.05.017.1	1
						12mm		90.2.12.002.1	2
						15mm		90.2.15.001.1	2
						20mm		90.7.20.010.1	7
						25mm		90.7.25.011.1	7
						30mm		90.7.30.002.1	7
745i, 745iL, 750i, (E65/E66)	02-08	5x120	72.5 mm	Bolt	14x1.5	5mm	S11	90.1.05.017.2	1
						12mm		90.2.12.002.2	2
						15mm		90.2.15.001.2	2
						20mm		90.7.20.011.2	7
						25mm		90.7.25.012.2	7
						30mm		90.7.30.003.2	7
740i/ 740Li/ 750i/ 750Li, (Incl. xDrive) (F01)	09-12	5x120	72.5 mm	Bolt	14x1.25	12mm		90.2.12.002.7	2
						15mm		90.2.15.001.7	2
						20mm		90.2.20.020.7	2
						25mm		90.7.25.038.7	7
						30mm		90.7.30.032.7	7
840ci, 840i, 850i, (E31)	90-97	5x120	72.5 mm	Bolt	12x1.5	5mm	S11	90.1.05.017.1	1
						15mm		90.2.15.001.1	2
						20mm		90.7.20.010.1	7
						25mm		90.7.25.011.1	7
						30mm		90.7.30.002.1	7

(S13) Some models--only for use on the front axle--rear axle center hub may be too long. Fits only up to 16mm center hub height!

(S15) When using system 3/7 (50mm), the original wheel bolts can be too long. In this case, they must be changed to shorter bolts.

WHEEL SPACERS | Car, Truck & SUV's

Manufacture / Model	YEAR	P.C.D Bolt Pattern	Center Bore/ Hub Diameter	Bolt/ Stud	Thread Type	Spacer Width (Each)	Notes	PRO-SPACER with Bolts/Studs (Pair)	System Type
BMW									
X3, (E83)	04-10	5x120	72.5 mm	Bolt	14x1.5	5mm	S11	90.1.05.017.2	1
						12mm		90.2.12.002.2	2
						15mm		90.2.15.001.2	2
						20mm		90.2.20.020.2	2
						25mm		90.7.25.012.2	7
						30mm		90.7.30.003.2	7
X5, (E53)	00-06	5x120	72.5 mm	Bolt	14x1.5	5mm	S11	90.1.05.017.2	1
						12mm		90.2.12.002.2	2
						15mm		90.2.15.001.2	2
						20mm		90.2.20.020.2	2
						25mm		90.7.25.012.2	7
						30mm		90.7.30.003.2	7
X5, 35i, 35d,50i (E70)	07-12	5x120	74 mm	Bolt	14x1.25	4mm	S46	90.1.04.007.7	1
						12mm		90.2.12.014.7	2
						15mm		90.2.15.002.7	2
						20mm		90.2.20.027.7	2
						20mm		90.7.20.035.7	7
						25mm		90.7.25.032.7	7
30mm	90.7.30.026.7	7							
Z3, M-Coupe, M-Roadster, (E36/7)	96-02	5x120	72.5 mm	Bolt	12x1.5	5mm	S11	90.1.05.017.1	1
						12mm		90.2.12.002.1	2
						15mm		90.2.15.001.1	2
						20mm		90.7.20.010.1	7
						25mm		90.7.25.011.1	7
						30mm		90.7.30.002.1	7
Z4 (E85)	03-08	5x120	72.5 mm	Bolt	12x1.5	5mm	S11	90.1.05.017.1	1
						12mm		90.2.12.002.1	2
						15mm		90.2.15.001.1	2
						20mm		90.7.20.010.1	7
						25mm		90.7.25.011.1	7
						30mm		90.7.30.002.1	7
Z4 Roadster 30i, 35i (E89)	09-11	5x120	72.5 mm	Bolt	12x1.5	12mm	S67	90.2.12.002.1	2
						15mm		90.2.15.001.1	2
						20mm		90.7.20.010.1	7
						25mm		90.7.25.011.1	7
						30mm		90.7.30.002.1	7
Z8 (E52)	00-03	5x120	72.5 mm	Bolt	12x1.5	5mm	S11	90.1.05.017.1	1
						15mm		90.2.15.001.1	2
CHEVROLET									
Camaro	93-97	5x120.65	70.5 mm	Stud	12x1.5	15mm		90.6.15.033.1	6
Camaro	10-12	5x120	67 mm	Stud	14x1.5	15mm	S9	90.4.15.027.2	4
						20mm		90.4.20.035.2	4
						25mm		90.4.25.051.2	4
						30mm		90.4.30.044.2	4
Cruze Sedan	11-12	5x105	56.5 mm	Stud	12x1.5	15mm	S9	90.4.15.028.1	4
						20mm		90.4.20.036.1	4
						25mm		90.4.25.052.1	4
						30mm		90.4.30.045.1	4
S-10	82-04	5x120.65	70.5 mm	Stud	12x1.5	15mm	S33	90.6.15.033.1	6
						20mm		90.8.20.001.1	8
						25mm		90.8.25.005.1	8
						30mm		90.8.30.005.1	8
S-10	82-04	5x120.65	70.5 mm	Stud	14x1.5	25mm		90.4.25.025.2	4

(S16) Mazda / Nissan / Subaru have various wheel studs that are dependant on the model, axle or year manufactured. Before ordering, please check the knurl diameter of the

original wheel studs on both axles. In our kits, we include wheel studs with a knurl diameter of 14.9mm (14.3mm for Subaru). Other Knurl diameter sizes need to be indicated when ordering!

Manufacture / Model	YEAR	P.C.D Bolt Pattern	Center Bore/ Hub Diameter	Bolt/ Stud	Thread Type	Spacer Width (Each)	Notes	PRO-SPACER with Bolts/Studs (Pair)	System Type
CHRYSLER									
300 2WD, 300C 2WD	05-10	5x115	71.4 mm	Bolt	14x1.5	25mm	S33,S37	90.4.25.030.2	4
						30mm	S33,S37	90.4.30.017.2	4
Crossfire	04-07	5x112	66.5 mm	Bolt	12x1.5	5mm	S6,S11	90.1.05.014.1	1
						10mm	S6	90.2.10.002.1	2
						15mm	S6	90.2.15.017.1	2
						20mm	S6	90.2.20.007.1	2
						25mm	S6	90.7.25.009.1	7
						30mm	S6	90.7.30.001.1	7
Neon (Front)	95-06	5x100	57.1 mm	Stud	12x1.5	5mm	S11,S30,S33	90.5.05.032.1	5
						10mm	S30,S33	90.6.10.006.1	6
						15mm	S30,S33	90.6.15.028.1	6
						20mm	S30,S33	90.6.20.020.1	6
						30mm	S9	90.4.30.006.1	4
Neon (Rear)	95-06	5x100	57.1 mm	Stud	12x1.5	10mm	S30,S33	90.6.10.007.1	6
						15mm	S30,S33	90.6.15.029.1	6
						20mm	S30,S33	90.6.20.021.1	6
						30mm	S9	90.4.30.006.1	4
PT Cruiser (Front)	00-10	5x100	57.1 mm	Stud	12x1.5	5mm	S11,S30,S33	90.5.05.032.1	5
						10mm	S30,S33	90.6.10.006.1	6
						15mm	S30,S33	90.6.15.028.1	6
						20mm	S30,S33	90.6.20.020.1	6
						30mm	S9	90.4.30.006.1	4
PT Cruiser (Rear)	00-10	5x100	57.1 mm	Stud	12x1.5	10mm	S30,S33	90.6.10.007.1	6
						15mm	S30,S33	90.6.15.029.1	6
						20mm	S30,S33	90.6.20.021.1	6
						30mm	S9	90.4.30.006.1	4
Sebring Cabrio	00-10	5x100	57.1 mm	Stud	12x1.5	10mm	S30,S33	90.6.10.006.1	6
						15mm	S30,S33	90.6.15.028.1	6
						20mm	S30,S33	90.6.20.020.1	6
						30mm	S9	90.4.30.006.1	4
DODGE									
Magnum 2WD	05-10	5x115	71.4 mm	Bolt	14x1.5	25mm	S33,S37	90.4.25.030.2	4
						30mm	S33,S37	90.4.30.017.2	4
FERRARI									
360 Modena	99-05	5x108	67 mm	Bolt	14x1.5	30mm		90.3.30.004.2	3
FIAT									
500 (312)	2012	4x98	58 mm	Bolt	12x1.25	5mm	S3	90.1.05.011.4	1
						10mm		90.2.10.021.4	2
						15mm		90.2.15.020.4	2
						20mm		90.7.20.012.4	7
						25mm		90.7.25.006.4	7
						30mm		90.7.30.005.4	7
FORD									
Contour	95-00	4x108	63.3 mm	Stud	12x1.5	5mm	S33	90.5.05.004.1	5
						15mm	S33	90.6.15.015.1	6
						20mm	S33	90.6.20.005.1	6
						25mm	S9	90.4.25.008.1	4
						30mm	S9	90.4.30.003.1	4
Escort	85-01	4x108	63.3 mm	Stud	12x1.5	5mm	S33	90.5.05.004.1	5
						15mm	S33	90.6.15.015.1	6
						20mm	S33	90.6.20.005.1	6
						25mm	S9	90.4.25.008.1	4
						30mm	S9	90.4.30.003.1	4
Fiesta	11-12	4x108	63.3 mm	Stud	12x1.5	15mm	S33	90.6.15.015.1	6
						20mm	S33	90.6.20.005.1	6
						25mm	S9,S23	90.4.25.008.1	4
						30mm	S9,S23	90.4.30.003.1	4

(S17) For vehicles with a center hub height up to 16mm.
 (S18) The original seat cone of the original bolts must be re-used!

(S19) For vehicles with sliding doors, check for clearance--wheel spacers of 25mm / 30mm may not allow enough room for wheels/tires.

WHEEL SPACERS | Car, Truck & SUV's

Manufacture / Model	YEAR	P.C.D Bolt Pattern	Center Bore/ Hub Diameter	Bolt/ Stud	Thread Type	Spacer Width (Each)	Notes	PRO-SPACER with Bolts/Studs (Pair)	System Type
FORD									
Focus	00-06	4x108	63.3 mm	Stud	12x1.5	5mm	S33	90.5.05.004.1	5
						15mm	S33	90.6.15.015.1	6
						20mm	S33	90.6.20.005.1	6
						25mm	S9	90.4.25.008.1	4
						30mm	S9	90.4.30.003.1	4
Fusion	06-12	4x108	63.3 mm	Stud	12x1.5	5mm	S33	90.5.05.004.1	6
						15mm	S33	90.6.15.015.1	6
						20mm	S33	90.6.20.005.1	6
						25mm	S9,S23	90.4.25.008.1	4
						30mm	S9,S23	90.4.30.003.1	4
Explorer	90-04	5x114.3	70.5 mm	Stud	1/2 UNF	25mm	S9	90.4.25.010.3	4
						30mm	S9	90.4.30.005.3	4
						35mm	S9	90.4.35.001.3	4
						45mm	S9	90.4.45.001.3	4
Ranger	98-06	5x114.3	70.5 mm	Stud	1/2 UNF	25mm	S9	90.4.25.010.3	4
						30mm	S9	90.4.30.005.3	4
						35mm	S9	90.4.35.001.3	4
						45mm	S9	90.4.45.001.3	4
Mustang (FOX)	79-93	5x114.3	70.5 mm	Stud	1/2 UNF	5mm		90.5.05.038.3	5
						25mm	S9	90.4.25.010.3	4
						30mm	S9	90.4.30.005.3	4
						35mm	S9	90.4.35.001.3	4
						45mm	S9	90.4.45.001.3	4
Mustang (SN95)	94-04	5x114.3	70.5 mm	Stud	1/2 UNF	5mm		90.5.05.038.3	5
						25mm	S9, S23	90.4.25.010.3	4
						30mm	S9, S23	90.4.30.005.3	4
						35mm	S9, S23	90.4.35.001.3	4
						45mm	S9, S23	90.4.45.001.3	4
Mustang, (Front) (S197)	05-12	5x114.3	70.5 mm	Stud	1/2 UNF	5mm		90.5.05.038.3	5
						20mm	S23, S37	90.4.20.016.3	4
						25mm	S23, S37	90.4.25.032.3	4
						30mm	S23, S37	90.4.30.019.3	4
						35mm	S23, S37	90.4.35.005.3	4
Mustang, (Rear) (S197)	05-12	5x114.3	70.5 mm	Stud	1/2 UNF	5mm		90.5.05.038.3	5
						20mm	S23, S37	90.4.20.017.3	4
						25mm	S23, S37	90.4.25.033.3	4
						30mm	S23, S37	90.4.30.020.3	4
						35mm	S23, S37	90.4.35.006.3	4
GMC									
S-15	82-04	5x120.65	70.5 mm	Stud	12x1.5	15mm		90.6.15.033.1	6
S-15	82-04	5x120.65	70.5 mm	Stud	14x1.5	25mm		90.4.25.025.2	4
JEEP									
Gr. Cherokee (ZJ)	93-98	5x114.3	71.5 mm	Stud	1/2 UNF	30mm	S9	90.4.30.008.3	4
Gr. Cherokee (WH)	05-10	5x127	71.5 mm	Stud	1/2 UNF	25mm	S9,S41	90.4.25.013.3	4
						27mm	S9,S41	90.4.27.001.3	4
						30mm	S9,S41	90.4.30.007.3	4
Wrangler (TJ)	96-06	5x114.3	71.5 mm	Stud	1/2 UNF	30mm	S9	90.4.30.008.3	4
Wrangler (JK)	07-11	5x127	71.5 mm	Stud	1/2 UNF	25mm	S9	90.4.25.013.3	4
						27mm	S9	90.4.27.001.3	4
						30mm	S9	90.4.30.007.3	4
HONDA									
Accord, 2 & 4-door, Incl. Wagon, 4 Cyl. (CB/CD)	90-02	4x114.3	64 mm	Stud	12x1.5	5mm	S33	90.5.05.018.1	5
						15mm	S33	90.6.15.021.1	6

(S21) The steering angle may need to be limited.

(S22) In combination with spacer rings, an 18-inch wheel/rim- combination is only permitted if the wheel has been already approved by the TÜV as original equipment.

(S23) Do not use with vehicles equipped with steel wheels!

Manufacture / Model	YEAR	P.C.D Bolt Pattern	Center Bore/ Hub Diameter	Bolt/ Stud	Thread Type	Spacer Width (Each)	Notes	PRO-SPACER with Bolts/Studs (Pair)	System Type
Civic / CRX (EF,EG,EK,EM)	84-02	4x100	56.1 mm	Stud	12x1.5	5mm	S33	90.5.05.005.1	5
Civic Si (EM1)	99-00	4x100	56.1 mm	Stud	12x1.5	5mm	S33	90.5.05.005.1	5
Civic (FA,FD,FG,FK,FN)	06-11	5x114.3	64 mm	Stud	12x1.5	10mm	S33	90.6.10.012.1	6
						15mm	S33	90.6.15.038.1	6
						20mm	S33	90.6.20.015.1	6
						30mm	S9	90.4.30.027.1	4
Del Sol (EG)	93-97	4x100	56.1 mm	Stud	12x1.5	5mm	S33	90.5.05.005.1	5
Prelude, Incl. AWS	83-91	4x100	56.1 mm	Stud	12x1.5	5mm	S33	90.5.05.005.1	5
INFINITI									
G25, G35, G37, Coupe & Sedan (Incl. AWD)	03-11	5x114.3	66.1 mm	Stud	12x1.25	5mm	S16,S33	90.5.05.030.4	5
						15mm	S16,S33	90.6.15.026.4	6
						15mm	S9,S23	90.4.15.001.4	4
						20mm	S16,S33	90.6.20.019.4	6
						20mm	S9,S23	90.4.20.003.4	4
25mm	S9,S23	90.4.25.019.4	4						
LEXUS									
GS 300, GS 350, GS 430	06-11	5x114.3	60 mm	Stud	12x1.5	15mm	S33	90.6.15.034.1	6
						20mm	S9	90.4.20.013.1	4
						25mm	S9	90.4.25.029.1	4
						30mm	S9	90.4.30.016.1	4
IS300	99-05	5x114.3	60 mm	Stud	12x1.5	15mm	S33	90.6.15.034.1	6
						20mm	S9	90.4.20.013.1	4
						25mm	S9	90.4.25.029.1	4
						30mm	S9	90.4.30.016.1	4
IS 250, IS 350	06-11	5x114.3	60 mm	Stud	12x1.5	15mm	S33	90.6.15.034.1	6
						20mm	S9	90.4.20.013.1	4
						25mm	S9	90.4.25.029.1	4
						30mm	S9	90.4.30.016.1	4
LX470 (UZJ100)	98-07	6x139.7	108.5 mm	Stud	12x1.5	25mm 30mm	S9,S11 S9,S11	90.8.25.004.1 90.8.30.004.1	8 8
MAZDA									
323	89-98	4x100	54.1 mm	Stud	12x1.5	5mm	S16,S33	90.5.05.008.1	5
						15mm	S16, S24, S33	90.6.15.010.1	6
3 Sedan, Mazdaspeed3, Incl. 5-door	04-09	5x114.3	67.1 mm	Stud	12x1.5	5mm	S16,S11,S33	90.5.05.031.1	5
						10mm	S16,S33	90.6.10.005.1	6
						15mm	S16,S33	90.6.15.027.1	6
						15mm	S1,S23	90.4.15.002.1	4
						20mm	S1,S23	90.4.20.005.1	4
25mm	S1,S23	90.4.25.016.1	4						
3 Sedan, Mazdaspeed3, Incl. 5-door	10-11	5x114.3	67.1 mm	Stud	12x1.5	10mm	S16,S33	90.6.10.005.1	6
						15mm	S16,S33	90.6.15.027.1	6
						15mm	S1,S23	90.4.15.002.1	4
						20mm	S1,S23	90.4.20.005.1	4
						25mm	S1,S23	90.4.25.016.1	4
6, Sedan & Wagon	03-08	5x114.3	67.1 mm	Stud	12x1.5	5mm	S16,S11,S33	90.5.05.031.1	5
						10mm	S3,S16,S33	90.6.10.005.1	6
						15mm	S16,S33	90.6.15.027.1	6
						15mm	S1,S23	90.4.15.002.1	4
						20mm	S1,S23	90.4.20.005.1	4
						25mm	S1,S23	90.4.25.016.1	4
MX3	92-95	4x100	54.1 mm	Stud	12x1.5	5mm	S16,S33	90.5.05.008.1	5
						15mm	S16,S24,S33	90.6.15.010.1	6

(S24) With newer models, the center stud can be more than 54.1mm diameter. In this case, the wheel spacer cannot be used.

(S25) Cannot be installed with some Turbo models--due to different front axle center hub.

WHEEL SPACERS | Car, Truck & SUV's

Manufacture / Model	YEAR	P.C.D Bolt Pattern	Center Bore/ Hub Diameter	Bolt/ Stud	Thread Type	Spacer Width (Each)	Notes	PRO-SPACER with Bolts/Studs (Pair)	System Type
MAZDA									
Miata	90-05	4x100	54.1 mm	Stud	12x1.5	5mm 15mm	S16,S33 S16,S24,S33	90.5.05.008.1 90.6.15.010.1	5 6
MX-5	06-12	5x114.3	67 mm	Stud	12x1.5	10mm 15mm 20mm 25mm 30mm	S16,S33 S16,S33 S16,S33 S9 S9	90.6.10.019.1 90.6.15.043.1 90.6.20.028.1 90.4.25.016.1 90.4.30.015.1	6 6 6 4 4
RX-8	03-11	5x114.3	67.1 mm	Stud	12x1.5	5mm 10mm 15mm 15mm 20mm 25mm	S16,S11,S33 S16,S33 S16,S33 S1,S6,S23 S1,S23 S1,S23	90.5.05.031.1 90.6.10.005.1 90.6.15.027.1 90.4.15.002.1 90.4.20.001.1 90.4.25.016.1	5 6 6 4 4 4
MERCEDES									
C-Class (W201)	82-93	5x112	66.5 mm	Bolt	12x1.5	5mm 15mm 20mm 25mm 30mm	S11,S57 S51,S57 S52,S57 S6 S6	90.1.05.014.1 90.2.15.017.1 90.2.20.007.1 90.7.25.009.1 90.7.30.001.1	1 2 2 7 7
C-Class (W202)	94-02	5x112	66.5 mm	Bolt	12x1.5	5mm 10mm 15mm 20mm 25mm 30mm	S11,S57 S48,S57 S51,S57 S52,S57 S6,S15 S6,S15	90.1.05.014.1 90.2.10.002.1 90.2.15.017.1 90.2.20.007.1 90.7.25.009.1 90.7.30.001.1	1 2 2 2 7 7
C-Class (W203)	02-07	5x112	66.5 mm	Bolt	12x1.5	10mm 15mm 20mm 25mm 30mm	S48,S57 S51,S57 S52,S57 S6,S15 S6,S17	90.2.10.002.1 90.2.15.017.1 90.2.20.007.1 90.7.25.009.1 90.7.30.001.1	2 2 2 7 7
C300 / C350 (W204)	07-12	5x112	66.5 mm	Bolt	14x1.5	10mm 15mm 20mm 20mm 25mm 30mm	S6,S57 S57 S57 S57 S6,S15 S6,S15	90.2.10.002.2 90.2.15.017.2 90.2.20.007.2 90.7.20.016.2 90.7.25.016.2 90.7.30.007.2	2 2 2 7 7 7
CL (W215)	98-04	5x112	66.5 mm	Bolt	14x1.5	5mm 10mm 15mm 20mm	S6,S11 S6 S6 S6	90.1.05.014.2 90.2.10.002.2 90.2.15.017.2 90.2.20.035.2	1 2 2 2
CLK (W208)	97-02	5x112	66.5 mm	Bolt	12x1.5	5mm 15mm 20mm 25mm 30mm	S11,S57 S51,S57 S52,S57 S6,S15 S6,S15	90.1.05.014.1 90.2.15.017.1 90.2.20.007.1 90.7.25.009.1 90.7.30.001.1	1 2 2 7 7
CLK (W209)	02-08	5x112	66.5 mm	Bolt	12x1.5	10mm 15mm 20mm 25mm 30mm	S48,S57 S51,S57 S52,S57 S6,S15 S6,S15	90.2.10.002.1 90.2.15.017.1 90.2.20.007.1 90.7.25.009.1 90.7.30.001.1	2 2 2 7 7
CLS (W219)	05-10	5x112	66.5 mm	Bolt	14x1.5	10mm 15mm 20mm 25mm 30mm	S6,S57 S6,S57 S6,S57 S6 S6	90.2.10.002.2 90.2.15.017.2 90.2.20.007.2 90.7.25.016.2 90.7.30.007.2	2 2 2 7 7

(S28) When using system 3/7, the original wheel bolts are too long and need to be replaced with shorter bolts: part # 95-4-7-14-50-2817.

(S30) Wheel hub/axle needs to be disassembled for replacing standard wheel studs with longer studs.

Manufacture / Model	YEAR	P.C.D Bolt Pattern	Center Bore/ Hub Diameter	Bolt/ Stud	Thread Type	Spacer Width (Each)	Notes	PRO-SPACER with Bolts/Studs (Pair)	System Type
E-Class (W124)	92-95	5x112	66.5 mm	Bolt	12x1.5	5mm	S11,S57	90.1.05.014.1	1
						15mm	S51,S57	90.2.15.017.1	2
						20mm	S52,S57	90.2.20.007.1	2
						25mm	S6	90.7.25.009.1	7
						30mm	S6	90.7.30.001.1	7
E-Class (W210)	95-02	5x112	66.5 mm	Bolt	12x1.5	5mm	S11,S57	90.1.05.014.1	1
						10mm	S48,S57	90.2.10.002.1	2
						15mm	S51,S57	90.2.15.017.1	2
						20mm	S52,S57	90.2.20.007.1	2
						25mm	S6	90.7.25.009.1	7
						30mm	S6	90.7.30.001.1	7
E-Class (W211)	95-09	5x112	66.5 mm	Bolt	14x1.5	10mm	S57	90.2.10.002.2	2
						15mm	S57	90.2.15.017.2	2
						20mm	S57	90.2.20.035.2	2
						25mm	S57	90.7.25.016.2	7
						30mm	S57	90.7.30.007.2	7
E350, Coupe 3.5L V6 (C207)	09-12	5x112	66.5 mm	Bolt	14x1.5	10mm	S6,S57	90.2.10.002.2	2
						12mm	S6,S57	90.2.12.004.2	2
						15mm	S57	90.2.15.017.2	2
						20mm	S57	90.2.20.007.2	2
						20mm		90.7.20.016.2	7
						25mm		90.7.25.016.2	7
30mm		90.7.30.007.2	7						
S-Class (W126)	79-91	5x112	66.5 mm	Bolt	12x1.5	5mm	S11,S57	90.1.05.014.1	1
						15mm	S51,S57	90.2.15.017.1	2
						20mm	S52,S57	90.2.20.007.1	2
						25mm	S6	90.7.25.009.1	7
						30mm	S6	90.7.30.001.1	7
S-Class (W140, W220)	91-06	5x112	66.5 mm	Bolt	14x1.5	5mm	S11,S57	90.1.05.014.2	1
						10mm	S48,S57	90.2.10.002.2	2
						15mm	S51,S57	90.2.15.017.2	2
						20mm	S52,S57	90.2.20.035.2	2
SL (R107,R129)	72-81, 89-01	5x112	66.5 mm	Bolt	12x1.5	5mm	S11,S57	90.1.05.014.1	1
						15mm	S51,S57	90.2.15.017.1	2
						20mm	S52,S57	90.2.20.007.1	2
						25mm	S6	90.7.25.009.1	7
						30mm	S6	90.7.30.001.1	7
SL (R230)	03-10	5x112	66.5 mm	Bolt	14x1.5	15mm	S6,S57	90.2.15.017.2	2
						20mm	S6,S57	90.2.20.035.2	2
						25mm	S6	90.7.25.016.2	7
						30mm	S6	90.7.30.007.2	7
SLK (R170,R171)	96-10	5x112	66.5 mm	Bolt	12x1.5	5mm	S11,S57	90.1.05.014.1	1
						10mm	S48,S57	90.2.10.002.1	2
						15mm	S51,S57	90.2.15.017.1	2
						20mm	S52,S57	90.2.20.007.1	2
						25mm	S6	90.7.25.009.1	7
						30mm	S6	90.7.30.001.1	7
M-Class (W163)	97-05	5x112	66.5 mm	Bolt	14x1.5	5mm	S57	90.1.05.014.2	1
						10mm	S57	90.2.10.002.2	2
						15mm	S57	90.2.15.017.2	2
						20mm	S57	90.2.20.035.2	2
						25mm	S57	90.7.25.016.2	7
						30mm	S57	90.7.30.007.2	7
M-Class (W164)	06-11	5x112	66.5 mm	Bolt	14x1.5	10mm	S50,S53,S57	90.2.10.002.2	2
						15mm	S49,S53,S57	90.2.15.017.2	2
						20mm	S49,S53,S57	90.2.20.035.2	2
						25mm		90.7.25.016.2	7
						30mm		90.7.30.007.2	7

(S32) Original studs do not need to be changed.

(S33) Original studs must be changed. Longer studs are included.

(S35) When using system 3/7, the original wheel bolts are too long and need to be replaced with shorter bolts: part # 95-4-1-14-50-2819.

WHEEL SPACERS | Car, Truck & SUV's

Manufacture / Model	YEAR	P.C.D Bolt Pattern	Center Bore/ Hub Diameter	Bolt/ Stud	Thread Type	Spacer Width (Each)	Notes	PRO-SPACER with Bolts/Studs (Pair)	System Type
MERCURY									
Cougar	89-00	4x108	63.3 mm	Stud	12x1.5	5mm	S33	90.5.05.004.1	5
						15mm	S33	90.6.15.015.1	6
						20mm	S33	90.6.20.005.1	6
						25mm	S9	90.4.25.008.1	4
						30mm	S9	90.4.30.003.1	4
Mystique	95-00	4x108	63.3 mm	Stud	12x1.5	5mm	S33	90.5.05.004.1	5
						15mm	S33	90.6.15.015.1	6
						20mm	S9	90.6.20.005.1	6
						25mm	S9	90.4.25.008.1	4
						30mm	S9	90.4.30.003.1	4
Capri	79-89	5x114.3	70.5 mm	Stud	1/2 UNF	25mm	S9	90.4.25.010.3	4
						30mm	S9	90.4.30.005.3	4
						35mm	S9	90.4.35.001.3	4
						45mm	S9	90.4.45.001.3	4
MINI									
Clubman, Clubman-S (N)	08-12	4x100	56 mm	Bolt	14x1.25	5mm		90.1.05.025.2	1
						15mm		90.2.15.027.2	2
						20mm		90.2.20.016.2	2
						25mm		90.7.25.034.2	7
Cooper, Cooper-S (R50)	01-06	4x100	56 mm	Bolt	12x1.5	5mm		90.1.05.025.1	1
						15mm		90.2.15.027.1	2
						20mm		90.2.20.016.1	2
						25mm		90.7.25.029.1	7
Cooper, Cooper-S, Convertible, Convertible-S (N)	07-12	4x100	56 mm	Bolt	14x1.25	5mm		90.1.05.025.2	1
						15mm		90.2.15.027.2	2
						20mm		90.2.20.016.2	2
						25mm		90.7.25.034.2	7
Countryman (R60)	11-12	5x120	72.5 mm	Bolt	14x1.25	12mm		90.2.12.002.7	2
						15mm		90.2.15.001.7	2
NISSAN									
350Z (Z33)	03-08	5x114.3	66.1 mm	Stud	12x1.25	5mm	S16,S33	90.5.05.030.4	5
						10mm	S16,S33	90.6.10.004.4	6
						15mm	S16,S33	90.6.15.026.4	6
						15mm	S9,S23	90.4.15.001.4	4
						20mm	S16,S33	90.6.20.019.4	6
						20mm	S9,S23	90.4.20.003.4	4
370Z (Z34)	09-12	5x114.3	66.1 mm	Stud	12x1.25	10mm	S16,S33	90.6.10.004.4	6
						15mm	S16,S33	90.6.15.026.4	6
						15mm	S9,S23	90.4.15.026.4	4
						20mm	S16,S33	90.6.20.019.4	6
						20mm	S9,S23	90.4.20.034.4	4
						25mm	S9,S23	90.4.25.050.4	4
Maxima	89-06	5x114.3	66.1 mm	Stud	12x1.25	5mm	S16,S33	90.5.05.030.4	5
						15mm	S16,S33	90.6.15.026.4	6
						25mm	S9,S23	90.4.25.019.4	4
Murano (T50)	06-07	5x114.3	66.1 mm	Stud	12x1.25	10mm	S16,S33	90.6.10.004.4	6
						15mm	S16,S33	90.6.15.026.4	6
						20mm	S16,S33	90.6.20.019.4	6
						20mm	S9,S23	90.4.20.003.4	4
						25mm	S9,S23	90.4.25.019.4	4
Pathfinder,(incl.Compact Truck) (WD21, R20,R50,MD21,D22)	86-04	6x139.7	110 mm	Stud	12x1.25	25mm	S9,S11	90.8.25.003.4	8
						30mm	S9,S11	90.8.30.003.4	8

(S37) When using the wheel spacers you have to verify that the wheels being used have suitable cut-outs to take up the original bolts. Without these cut-outs it is necessary to use the delivered studs in exchange to the original studs!

(S41) Not for use with some US-wheels, as these do not have the necessary cut outs.
(S46) This Kit includes additional wheel bolts to mount the wheel. When using this kit you have to use these wheel bolts as the original bolts are too long to mount the wheel.

Manufacture / Model	YEAR	P.C.D Bolt Pattern	Center Bore/ Hub Diameter	Bolt/ Stud	Thread Type	Spacer Width (Each)	Notes	PRO-SPACER with Bolts/Studs (Pair)	System Type
PORSCHE									
911 Carrera (930,959,964,993)	63-98	5x130	71.5 mm	Stud	14x1.5	7mm	S32	90.5.07.001.2	6
						7mm	S25,S32	90.6.07.001.2	6
						15mm	S33	90.6.15.018.2	6
						18mm	S33	90.6.18.001.2	6
911 (Incl. Cabrio, Turbo & GT3) (996)	98-05	5x130	71.5 mm	Bolt	14x1.5	7mm	S40	90.2.07.001.2	2
						15mm		90.2.15.018.2	2
						18mm		90.2.18.001.2	2
						23mm		90.2.23.001.2	2
						18mm	S46	90.7.18.001.2	7
						21mm		90.7.21.001.2	7
						23mm		90.7.23.001.2	7
911 (997)	05-11	5x130	71.5 mm	Bolt	14x1.5	7mm	S40	90.2.07.001.2	2
						15mm		90.2.15.018.2	2
						18mm		90.2.18.001.2	2
						23mm		90.2.23.001.2	2
						18mm	S46	90.7.18.001.2	7
						21mm		90.7.21.001.2	7
						23mm		90.7.23.001.2	7
928	77-95	5x130	71.5 mm	Stud	14x1.5	7mm	S32	90.6.07.001.2	6
						15mm	S33	90.6.15.018.2	6
						18mm	S33	90.6.18.001.2	6
944, 959	82-91	5x130	71.5 mm	Stud	14x1.5	7mm	S32	90.6.07.001.2	6
						15mm	S33	90.6.15.018.2	6
						18mm	S33	90.6.18.001.2	6
968, Coupe & Cabrio	92-95	5x130	71.5 mm	Stud	14x1.5	7mm	S32	90.6.07.001.2	6
						15mm	S33	90.6.15.018.2	6
						18mm	S33	90.6.18.001.2	6
Boxster (986,987)	96-10	5x130	71.5 mm	Bolt	14x1.5	7mm	S22	90.2.07.001.2	2
						15mm	S22	90.2.15.018.2	2
						18mm	S22	90.2.18.001.2	2
						23mm	S22	90.2.23.001.2	2
Cayenne (995)	03-10	5x130	71.5 mm	Bolt	14x1.5	7mm	S22	90.2.07.001.2	2
						15mm	S22	90.2.15.018.2	2
						18mm	S22	90.2.18.001.2	2
						23mm	S22	90.2.23.001.2	2
Cayman	06-12	5x130	71.5 mm	Bolt	14x1.5	7mm	S22	90.2.07.001.2	2
						15mm	S22	90.2.15.018.2	2
						18mm	S22	90.2.18.001.2	2
						23mm	S22	90.2.23.001.2	2
						18mm	S22	90.7.18.001.2	7
						21mm		90.7.21.001.2	7
						23mm		90.7.23.001.2	7
SAAB									
900, 9000	93-98	5x110	65 mm	Bolt	12x1.5	5mm		90.1.05.013.1	1
9.3	98-09	5x110	65 mm	Bolt	12x1.5	5mm	S11 S3	90.1.05.013.1	1
						10mm		90.1.10.002.1	1
						16mm		90.2.16.001.1	2
						20mm		90.2.20.006.1	2
						25mm		90.7.25.004.1	7
9.5	98-01	5x110	65 mm	Bolt	12x1.5	5mm	S11 S3	90.1.05.013.1	1
						10mm		90.1.10.002.1	1
						16mm		90.2.16.001.1	2
						20mm		90.2.20.006.1	2
						25mm		90.7.25.004.1	7

(S47) Original bolts have to be changed against shorter bolts or cut to length.
 (S48) When using System 2 (S90-2-...) you always have to fill out the checklist because of different original bolts length used on this car.

(S50) Also for front axle use from production date 14-2006 (Marking 14E06)
 (S51) Also for front axle use from production date 21-2006 (Marking 21E06)
 (S52) Also for front axle use from production date 35-2006 (Marking 35E06)

WHEEL SPACERS | Car, Truck & SUV's

Manufacture / Model	YEAR	P.C.D Bolt Pattern	Center Bore/ Hub Diameter	Bolt/ Stud	Thread Type	Spacer Width (Each)	Notes	PRO-SPACER with Bolts/Studs (Pair)	System Type
SMART									
Fortwo, Roadster	05-07	3x112	57.1 mm	Bolt	12x1.5	5mm		90.1.05.026.1	1
						10mm		90.2.10.010.1	2
						15mm		90.2.15.028.1	2
						20mm		90.2.20.017.1	2
						25mm		90.7.25.035.1	7
						30mm		90.7.30.028.1	7
Fortwo (Incl. Cabrio) (451)	08-11	3x112	57.1 mm	Bolt	12x1.5	10mm		90.2.10.010.1	2
						15mm		90.2.15.028.1	2
						20mm		90.2.20.017.1	2
						25mm		90.7.25.035.1	7
						30mm		90.7.30.028.1	7
SUBARU									
Impreza, WRX (Exc. STI)	93-07	5x100	56	Stud	12x1.25	5mm	S11,S16,S32	90.5.05.028.4	5
						10mm	S16,S33	90.6.10.003.4	6
						20mm	S9	90.4.20.002.4	4
						25mm	S9	90.4.25.017.4	4
Impreza, WRX, (Incl. STI)	08-11	5x100	56	Stud	12x1.25	20mm	S16,S33	90.6.20.034.4	6
						20mm	S9	90.4.20.002.4	4
						25mm	S9	90.4.25.017.4	4
						30mm	S9	90.4.30.030.4	4
TOYOTA									
Land Cruiser (UJ100)	98-07	6x139.7	108.5	Stud	12x1.5	25mm	S9,S11	90.8.25.004.1	8
						30mm	S9,S11	90.8.30.004.1	8
Yaris, 1.5L 4 Cyl (Incl. Hatchback, Sedan, S-Sedan)	07-11	4x100	54	Stud	12x1.5	10mm	S33	90.6.10.017.1	6
						12mm	S33	90.6.12.001.1	6
						15mm	S33	90.6.15.041.1	6
						20mm	S33	90.6.20.032.1	6
						30mm	S9	90.4.30.021.1	4
VOLKSWAGEN									
Beetle (Incl. Cabrio)	98-10	5x100	57.1	Bolt	14x1.5	5mm	S11	90.1.05.006.2	1
						8mm	S11	90.1.08.001.2	1
						15mm		90.2.15.005.2	2
						20mm		90.2.20.004.2	2
						25mm		90.7.25.003.2	7
Corrado	88-96	5x100	57.1	Bolt	14x1.5	5mm	S11	90.1.05.006.2	1
						8mm	S11	90.1.08.001.2	1
						15mm		90.2.15.005.2	2
						20mm		90.2.20.004.2	2
						25mm		90.7.25.003.2	7
Golf II, Golf III, Incl. Station Wagon, Cabrio (19E,1HX, 1H45, 1E/1E7)	83-99	4x100	57.1	Bolt	12x1.5	5mm	S11	90.1.05.010.1	1
						8mm	S11	90.1.08.003.1	1
						15mm	S13	90.2.15.004.1	2
						20mm		90.2.20.011.1	2
						25mm		90.7.25.001.1	7
Golf III, Golf IV, Golf R32, Incl. Station Wagon, Cabrio (1HX, 1H45,1E/1E7,1J1, 1J5)	91-05	5x100	57.1	Bolt	14x1.5	5mm	S11	90.1.05.006.2	1
						8mm	S11	90.1.08.001.2	1
						15mm		90.2.15.005.2	2
						20mm		90.2.20.004.2	2
						25mm		90.7.25.003.2	7
Jetta (1HXO)	91-98	4x100	57.1	Bolt	12x1.5	5mm	S11	90.1.05.010.1	1
						8mm	S11	90.1.08.003.1	1
						15mm	S13	90.2.15.004.1	2
						20mm		90.2.20.011.1	2
						25mm		90.7.25.001.1	7

(S53) Not for AMG-Models!
 (S57) Mercedes OEM wheels may use different bolt length. Therefore you have to examine, what bolt length is used. Please fill out the checklist! ATTENTION: If using 45mm original

bolts with your (original) wheels, you should order S90-7-20-016 or S90-7-21-002 instead, as we don't have bolts with 65mm shaft-length in our program!

Manufacture / Model	YEAR	P.C.D Bolt Pattern	Center Bore/ Hub Diameter	Bolt/ Stud	Thread Type	Spacer Width (Each)	Notes	PRO-SPACER with Bolts/Studs (Pair)	System Type
Jetta (1HX0, 1J2,1J6)	91-05	5x100	57.1	Bolt	14x1.5	5mm	S11	90.1.05.006.2	1
						8mm	S11	90.1.08.001.2	1
						15mm		90.2.15.005.2	2
						20mm		90.2.20.004.2	2
						25mm		90.7.25.003.2	7
Passat, Incl. Station Wagon (35 I)	88-96	4x100	57.1	Bolt	12x1.5	5mm	S11	90.1.05.010.1	1
						8mm	S11	90.1.08.003.1	1
						15mm	S13	90.2.15.004.1	2
						20mm		90.2.20.011.1	2
						25mm		90.7.25.001.1	7
Passat, Incl. Station Wagon (35 I)	96-00	5x100	57.1	Bolt	14x1.5	5mm	S11	90.1.05.016.2	1
						8mm	S11	90.1.08.001.2	1
						15mm		90.2.15.013.2	2
						20mm		90.2.20.003.2	2
						25mm		90.7.25.003.2	7
Passat, Incl. Station Wagon (35 I)	96-00	5x112	57.1	Bolt	14x1.5	5mm	S11	90.1.05.016.2	1
						8mm	S11	90.1.08.001.2	1
						15mm		90.2.15.013.2	2
						20mm		90.2.20.003.2	2
						25mm		90.7.25.003.2	7
CC (3CC)	09-12	5x112	57.1	Bolt	14x1.5	5mm	S11	90.1.05.016.2	1
						12mm	S63	90.2.12.003.2	2
						15mm		90.2.15.013.2	2
						20mm		90.2.20.003.2	2
						20mm		90.7.20.017.2	7
						25mm		90.7.25.005.2	7
						30mm		90.7.30.012.2	7
Eurovan	91-03	5x112	57.1	Bolt	14x1.5	5mm	S11	90.1.05.033.2	1
						15mm	S11	90.2.15.051.2	2
						20mm		90.2.20.033.2	2
						25mm		90.7.25.005.2	7
Tiguan	09-11	5x112	57.1	Bolt	14x1.5	12mm	S11	90.2.12.003.2	2
						15mm	S11	90.2.15.013.2	2
						20mm		90.2.20.003.2	2
						20mm		90.7.20.017.2	7
						25mm		90.7.25.005.2	7
						30mm		90.7.30.012.2	7
Touareg, V6 & V8	10/02-08	5x130	71.5	Bolt	14x1.5	15mm	S35	90.2.15.018.2	2
VOLVO									
850	93-97	4x108	65	Bolt	12x1.75	5mm	S21	90.1.05.012.5	1
						15mm	S21	90.2.15.008.5	2
850	93-97	5x108	65	Bolt	12x1.75	5mm	S21	90.1.05.020.5	1
						15mm		90.2.15.016.5	2
C70	97-05	5x108	65	Bolt	12x1.75	5mm	S21	90.1.05.020.5	1
						15mm	S21	90.2.15.016.5	2
S70, V70	97-00	4x108	65	Bolt	12x1.75	5mm	S21	90.1.05.012.5	1
						15mm	S21	90.2.15.008.5	2
S70, V70	97-00	5x108	65	Bolt	12x1.75	5mm	S21	90.1.05.020.5	1
						15mm	S21	90.2.15.016.5	2

(S67) When using 20mm System 7 spacers, the wheel bolts must not be longer than 13.5mm beyond the wheel hub. If this is the case the bolts must be replaced with shorter bolts. (Please follow installation instructions!)

(S68) Change of systems! System 3 spacers will be changed to System 7 spacers. If System 3 spacer is not available, you will automatically get System 7 spacers. ATTENTION! System 7 price is different from System 3.